


MAXI**CHARGER** DCCOMPACT

40kW



MAXI**CHARGER** DCCOMPACT

BIG POWER AND BIG VALUE IN A COMPACT PACKAGE

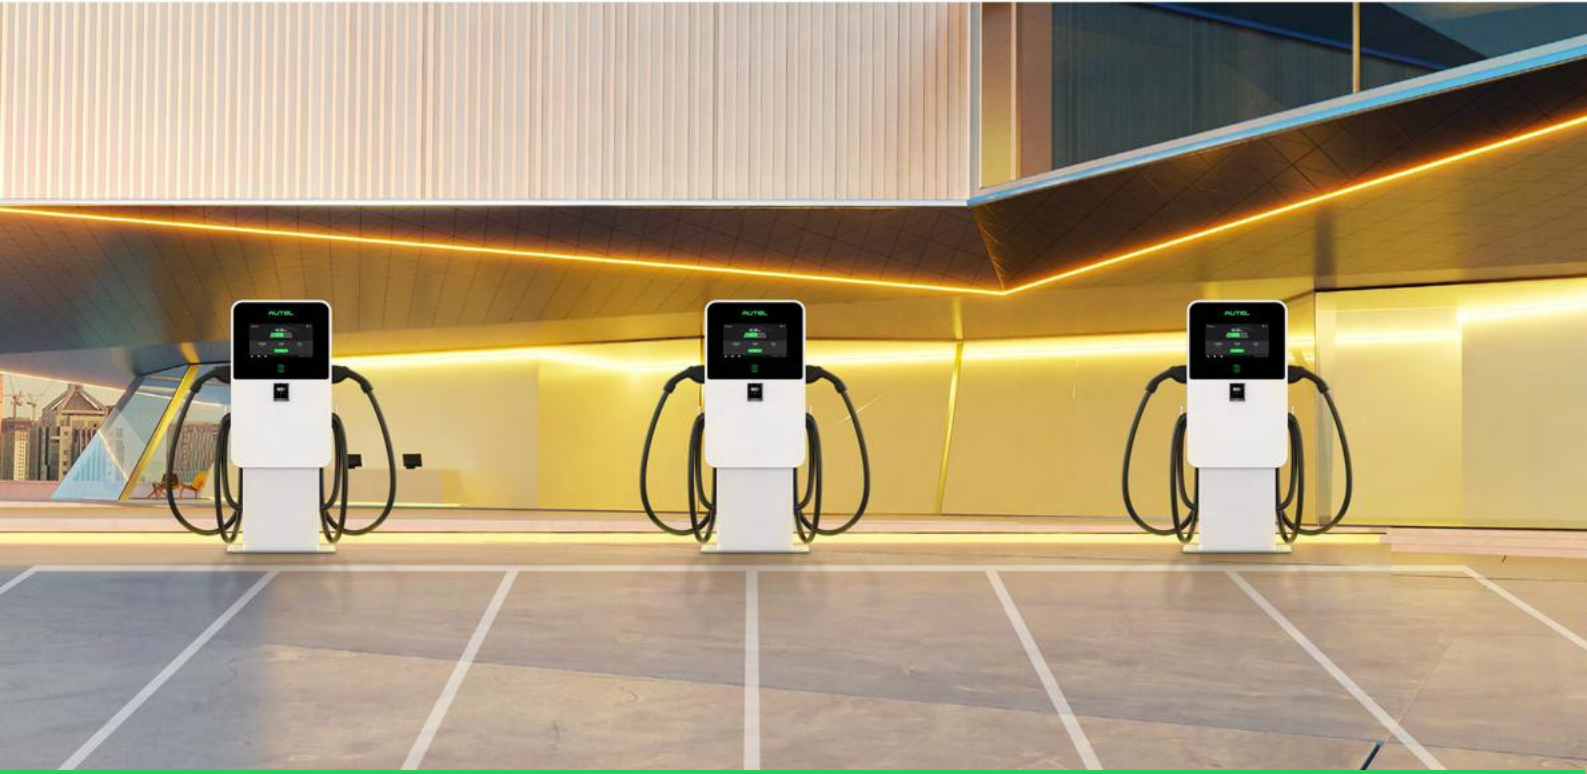

FAST AND EFFECTIVE

BUILT TO INCREASE CHARGING EFFICIENCY

- Dual-ports provide up to 40kW of power
- Charge 2 vehicles simultaneously
- A 30 min charge equates to 80+ miles of range



COMPACT DESIGN

OPTIMIZED FOR ANY LOCATION

- Ultra-compact with big DC power in a small package
- DC Compact has low installation costs, meaning a faster ROI due to reduced capital expenditures for the site operator












SMART ADVERTISING AND COMMUNICATION PORTAL

IMPROVE YOUR ROI

- User-friendly 21.5-inch LCD touch screen
- Powered by smart operating system, Android 10 with enhanced advertising
- placement Communicate, promote or attract customers generating new revenue streams

A CLOSER LOOK AT MAXICHARGER DCCOMPACT

-  OCPP1.6/2.0.1
-  One Stop Cloud Network Management
-  96% Charging Efficiency
-  Certified Through a 16-point Inspection Process
-  ISO 15118 Plug & Charge
-  Smart Charging
-  Compatible with CCS1, CCS2, CHAdeMO
-  Support APP, RFID Card, Credit Card, Mobile Payment
-  Weather Resistant



TECHNICAL SPECIFICATIONS

DC OUTPUT CONNECTION

Charging mode	Mode 4: CCS1
Output power	40kW
Output voltage	150-950V
Max output current	133A
Number of outputs	2*CCS1, or 1*CCS1+1*CHAdEMO, or
Peak efficiency	1*CCS1 ≥96%

AC INPUT CONNECTION

Earthing system	3P, PE (No neutral)
Input voltage	3-phase 480V
Input frequency	AC+10%~-15% 60Hz
Power factor	≥0.99
Harmonic distortion (THDi)	≤5%

GENERAL CHARACTERISTICS

Enclosure Rating	NEMA 3S
Operating altitude	2000m
Operating temperature range	-30°C~+55°C
Storage temperature range	-40°C~+70°C
Mounting	Wall or floor using a
Dimensions (H*W*D)	pedestal 1000×550×260 mm

USER INTERFACE

Screen type	21.5 inch LCD Touch Screen
Cable length	4m Standard; 5m Optional
Status indication	LED/LCD/APP
User interface	Autel Charge APP; Autel Charge Cloud
Connectivity	4G, Wi-Fi, Ethernet
Communication protocols	OCPP 1.6J
User authentication	(Can be upgraded to OCPP 2.0.1 later) APP, RFID card, Credit Card (Optional)

SOFTWARE UPDATE

OTA updates via web portal

CERTIFICATION AND STANDARDS

Safety and compliance	UL 2202, UL 2231-1, UL 2231-2, CSA No.107.1-16, NEC Article 625, ISO 15118 Plug&Charge
EMC compliance	FCC 15 Class A
Warranty	24 months, warranty extension possible